

**APPLICATIONS**


- Fire Alarm Systems
- Signaling Devices
- Electronic Equipment
- Indoor/Residential

**COMPLIANCE**

- ROHS Compliant
- Tensile Test
- Mechanical Test

**FEATURES**

- Footage Markers on Cable Jacket
- Voltage 300v

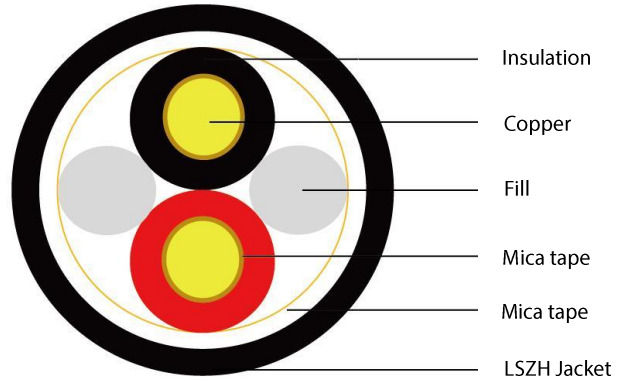

**TECHNICAL PARAMETER**

No. of Core		2 cores
Inner conductor	Material	Solid copper wire
	Structure	1/1.38±0.05 mm
	Cross-section	1.5mm <sup>2</sup>
	Material	Mica tape
	voltage class	300V
Insulation	Material	LSZH
	Average thickness	0.7mm
	Central thinnest thickness	0.53mm
	Overall diameter	3.2±0.15mm
Shield	Fill	LSZH
	Material	Mica tape
Jacket	Material	LSZH
	Average thickness	1.0mm
	Central thinnest thickness	0.75mm
	Overall diameter	9.0±0.3mm

**ORDERING INFORMATION**

Part No.	Description
VCFRSCC215LS	VIVANCO Fire Resistant Cable Unshielded, 2C*1.5mm <sup>2</sup> Solid Conductor