


STRUCTURE AND CHARACTER

S/N	Specification
1	19" standard installation, full assembling design, cable management slot
2	SPCC, Column 1.5mm, other 2.0mm
3	the maximum static load is up to 150KG

No.	Name
1	Column
2	Frame
3	Plinth

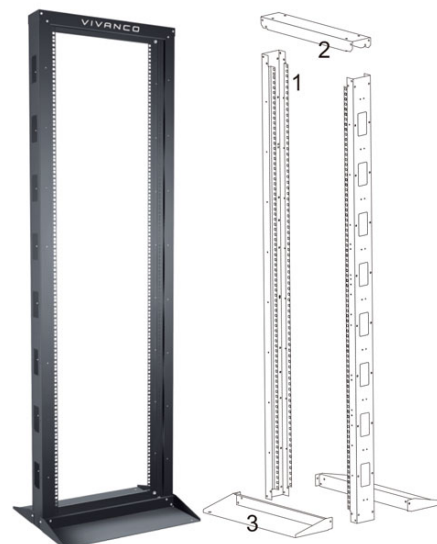

MAIN COMPONENTS

Name	Quantity	Material	Surface
Column	2	SPCC(1.5mm)	Powder Coated
Frame	1	SPCC(2.0mm)	
Plinth	2	SPCC(2.0mm)	


STANDARD ACCESSORIES

Part Name	Quantity	Description
Screw & Nuts	40 sets / 42U 20 sets / 29U	M6 Steel

OPTIONAL ACCESSORIES

Cantilever Slab	Positive installation
Cable Management	19", Positive installation

NAME CODING

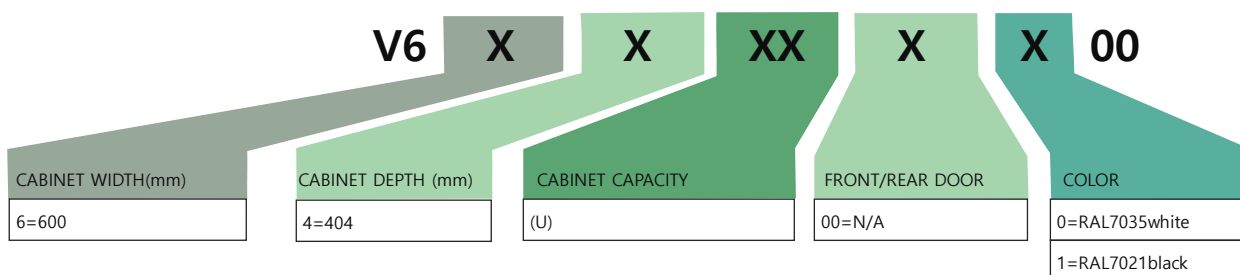

ORDERING INFORMATION AND COMPLIANCE

Part No.	Description		Compliance
	Dimension(Width × Depth × Height)	Capacity (U)	
V6.6429.00.■00	600×404×1397	29	ANSI/EIA RS-310-D IEC60297-2 DIN41494 PART7 DIN41494 PART1
V6.6442.00.■00	600×404×1975	42	

Note: Size and capacity can be customized