




Front

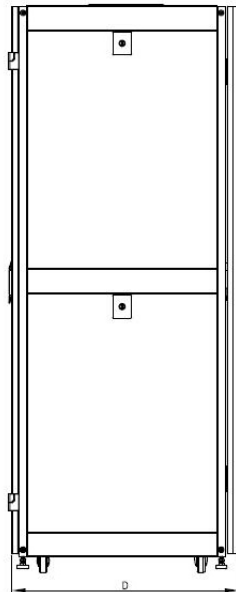

Side

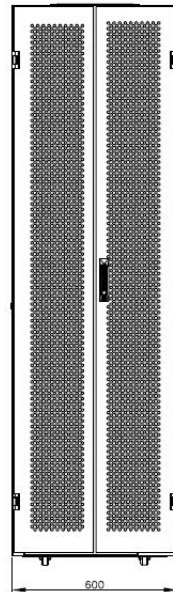

Back

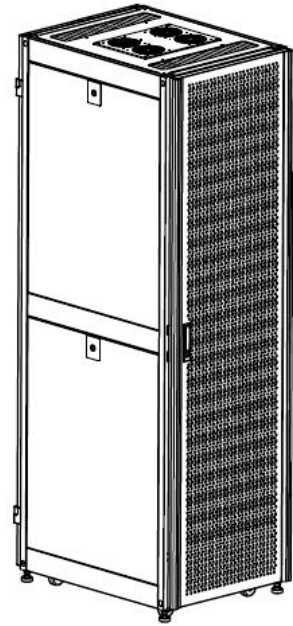

FEATURES & BENEFITS

- VF cabinet could be shipped in disassembled packing, saving the transportation and storage cost.
- New appearance design, side door: split into 2 parts, lockable with luxurious locker.
High density vented rear door that can be opened left or right, with external hinges, open angle up to 180 degree.
Casters: built-in installation design.
- Frame: duplex profile frame with patent, could be connected by 8 pieces of screws.
- Front door: High density with Aluminum profile package edge, with hidden hinges, turning angle up to 180 degrees. Door ventilation rate is up to 70%.
- Cable entries on top and bottom, with brush design to prevent dust and particle.
- Fan unit: installed from top outside of cabinet, easy to install and maintain.
- The angle gauge only with 3 pieces of screws for quick-change.



COMPLIANCE

- ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1
- DIN41494; PART7

SPECIFICATION

- Material:
Rails the zinc - coated steel sheets
Other SPCC cold rolled steel:
19"rails, Caster Support plate: 2.0mm
Top Bar 1.5mm,
Door, Top panel, Side frame 1.2mm
Others: 1.0mm
- Color:
RAL7035
RAL7021
- Loading Capacity:
• Static loading: 1300KG

OPTIONAL ACCESSORIES

Part name	QTY	Description	
M6*12	QTY		Standard configuration
M6 nut	40		
2.5" Castors	4		
M12 adjustable feet	4		

ORDERING INFORMATION

Part No.	Description	
	Dimension(Width × Depth × Height)	Capacity (U)
VF6042.56.100	600*1000*2072mm	42U
VF6242.56.100	600*1200*2072mm	42U