

FEATURES & BENEFITS

- Offer RJ45 port and support CAT 6 and CAT5e patch cord
- Each jack can be individually disassembled
- Each jack with a cover to prevent the dust
- Offer 25 port (1U) and 50 port (2U) type
- Standard 19", widely used as industry standard




PHYSICAL CHARACTERISTICS

IDC	Phosphor bronze
RJ45 Pin	Phosphor bronze with 50micronch gold plating
Plug Insertion	≥1000 times
IDC Insertion Life Span	≥250 times
AWG	22~26AWG

ELECTRICAL CHARACTERISTICS

Dielectric Strength	DC 1000V(AC750V) 1min,no breakdown and arcing phenomena
DC Resistance (Ω)	≤300mΩ
Connecting Resistance (Ω)	≤20mΩ
Insulation Resistance (Ω)	Under normal atmospheric pressure ≥500mΩ

NAME CODING

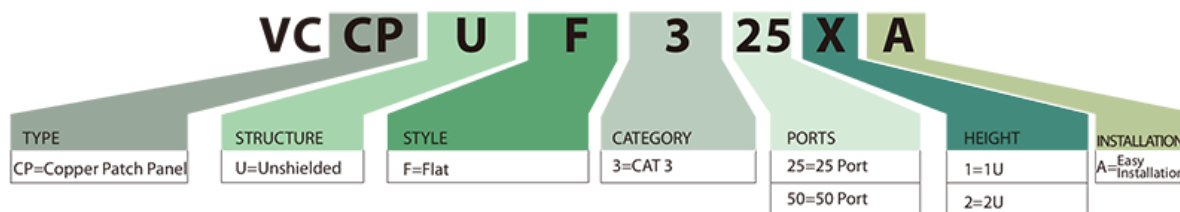

ORDERING INFORMATION

Part NO.	Description
VCCPUF3251	25 Port Voice Patch Panel
VCCPUF3502	50 Port Voice Patch Panel
VCCPUF3251A	25 Port Voice Patch Panel (easy installation)

Quick connect patch panel is optional and quick deployment (suitable for column square hole 9.5 * 9.5mm, hole center distance 31.75 mm)