


## COMPLIANCE

- ANSI/TIA 568-C.2 Category 6
- ISO/IEC 11801 Class E

## FEATURES & BENEFITS

- Standard 19" widely used industry standard adopts plastic front and steel rear frame
- Rear cable manager for cable management
- Connecting points adopt the special pin to effectively reduce NEXT
- Each keystone can be individually disassembled
- Offer 24Port (1U) and 48 port (2U) type

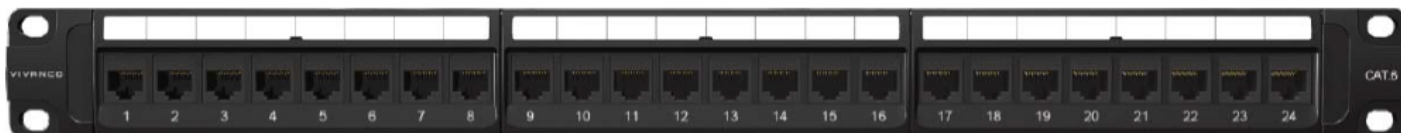


## PHYSICAL CHARACTERISTICS

IDC	Phosphor bronze
RJ45 Pin	Phosphor bronze with 50microinch gold plating
Plug Insertion	≥1000 times
IDC Insertion Life Span	≥250 times
AWG	22~26AWG
Wiring	T568A/T568B

## ELECTRICAL CHARACTERISTICS

Dielectric Strength	DC 1000V(AC750V) 1min,no breakdown and arcing phenomena
DC Resistance (Ω)	≤300mΩ
Connecting Resistance (Ω)	≤20mΩ
Insulation Resistance (Ω)	Under normal atmospheric pressure ≥500mΩ

## NAME CODING

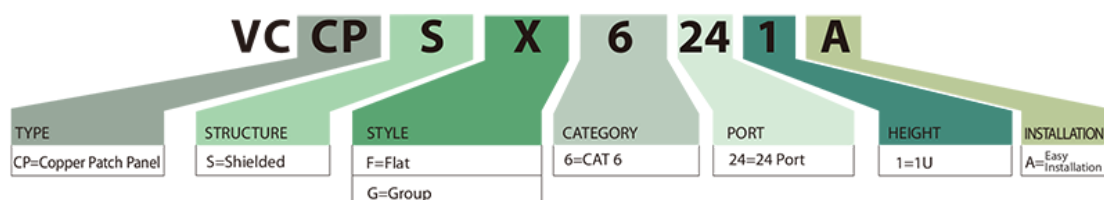

## ORDERING INFORMATION

Part NO.	Description
VCCPSF6241	CAT 6 Shielded 24 Port Patch Panel
VCCPSF6241A	CAT 6 Shielded 24 Port Patch Panel (easy installation)
VCCPSG6241	CAT 6 Shielded 24 Port Patch Panel (8 port as one unit)
VCCPSG6241A	CAT 6 Shielded 24 Port Patch Panel (8 port as one unit, easy installation)