

COMPLIANCE

- ANSI/TIA 568-C.2 Category 6A
- ISO/IEC 11801 Class E

FEATURES & BENEFITS

- Impedance matching between PCB & IDC leads to provide the best electrical performance
- Toolless design to provide easy installation
- Fully compatible with all VIVANCO wall plate
- Special design of IDC to reduce crosstalk




PHYSICAL CHARACTERISTICS

IDC	Phosphor bronze
RJ45 Pin	Phosphor bronze with 50microinch gold plating
Plug Insertion	≥1000 times
IDC Insertion Life Span	≥250 times
AWG	22~26AWG
Wiring	T568B

ELECTRICAL CHARACTERISTICS

Dielectric Strength	DC 1000V(AC750V) 1min,no breakdown and arcing phenomena
DC Resistance (Ω)	≤300mΩ
Connecting Resistance (Ω)	≤20mΩ
Insulation Resistance (Ω)	Under normal atmospheric pressure ≥500mΩ

NAME CODING

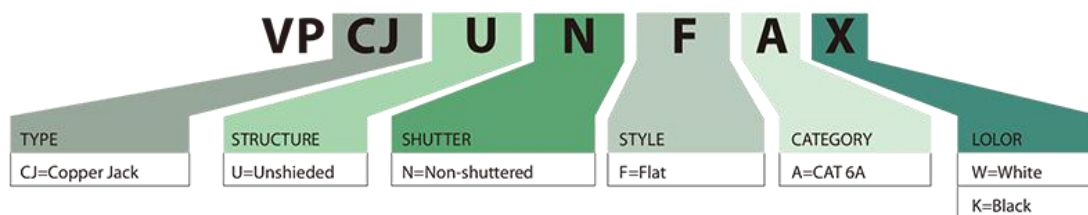

ORDERING INFORMATION

Part NO.	Description
VPCJUNFAWA	CAT 6A Unshielded RJ45 Keystone Jack, White, Toolless 180°