

FEATURES & BENEFITS


- Used to the branch connection of optical cable termination;
- 19"standard structure, rack mounting;
- Available for the installation of adaptors for FC, SC, ST, LC...;
- Drawer structure, easy for operation



SPECIFICATIONS

Type	Dimension	Max Capacity(Cores)	Remark
O2OF2-SC12	430×300×1U	12	The case body is made by cold rolled steel sheet, and the surface use the Technology of electrostatic spraying. Can be install with adaptors, FC,SC,ST,LC...adaptors are available.
O2OF2-FC12		24	
O2OF2-2SC24		48	
O2OF2-FC48	1430×300×2U	48	

NAME CODING

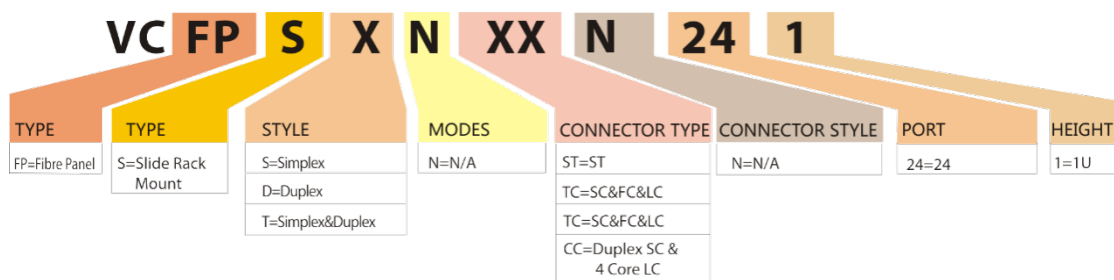

ORDERING INFORMATION AND COMPLIANCE

Part No.	Description	Compliance
VCFPSSNSTN241	24 port Optical Fibre Patch Panel (for 24 core ST, adaptor unloaded, rail,1U)	ISO/IEC11801:2008 ANSI/TIA 568-C. 3
VCFPSTNSLN241	24 port Optical Fibre Patch Panel (for 24 core SC, 48 core duplex LC, adaptor unloaded, rail,1U)	
VCFPSSNFCN241	24 port Optical Fibre Patch Panel (for 24 core FC, adaptor unloaded, rail,1U)	